

SC F150W

Scanjet Water Driven Gas Freeing Fan



KEY FEATURES

SC F150W

- High Performance
- Lightweight
- Deep penetration
- Reversible
- "Sealed for life" lubrication
- Easy Handling
- Safe Operation

Product Summary:

The SC F150W Portable Water Driven Gas Freeing Fan is suitable for use on all sizes and types of vessels.

The fan is designed as a High Performance, Deep Penetration Unit. Constructed from Stainless Steel and Aluminium it is lightweight and easily moved around the deck.

Quality Control

The SC F150W is produced in accordance with 9001 Quality Standards and our certificate of conformity and accreditation is available on request.

Typical application for SC F150W:

- Product Tankers
- Crude Oil Carriers
- Offshore
- Bulk Carriers
- FPSO
- OBO carriers



For accessories such as couplings, valves and hoses, please contact your local representative.





Distributed and Serviced by...
Tank Cleaning Technologies, Inc.
15200 Middlebrook Drive; Suite E
Houston, Texas 77058 - USA
Phone: +1 281.480.4041
Fax: +1 713 516.5883
Email: sales@tankcleantech.com

www.tankcleantech.com

Stocking Locations in USA, Canada and Mexico



Technical performance

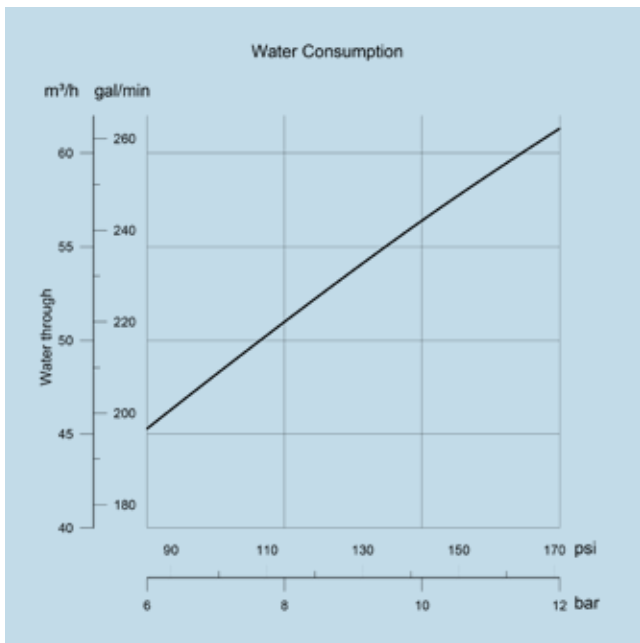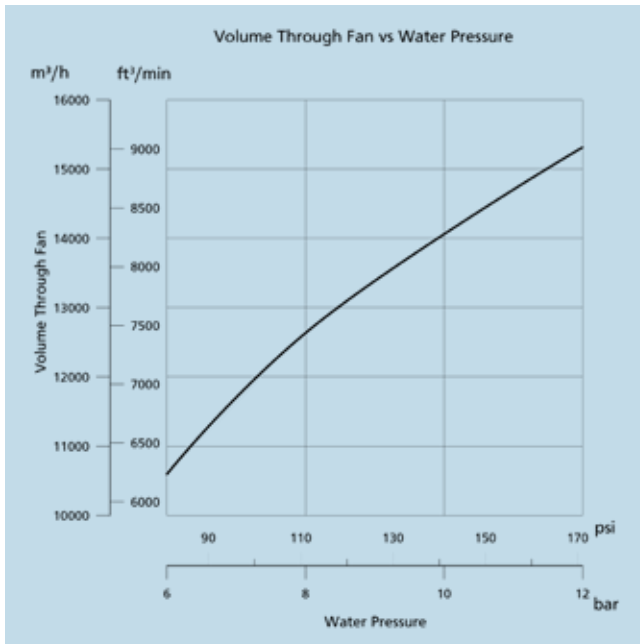

Adaptors can be supplied to suit other deck openings. Other types of water connections available on request.




Distributed and Serviced by...
 Tank Cleaning Technologies, Inc.
 15200 Middlebrook Drive, Suite E
 Houston, Texas 77058 - USA
 Phone: +1 281.480.4041
 Fax: +1 713 516.5883
 Email: sales@tankcleantech.com

www.tankcleantech.com

Stocking Locations in USA, Canada and Mexico

Dimensions

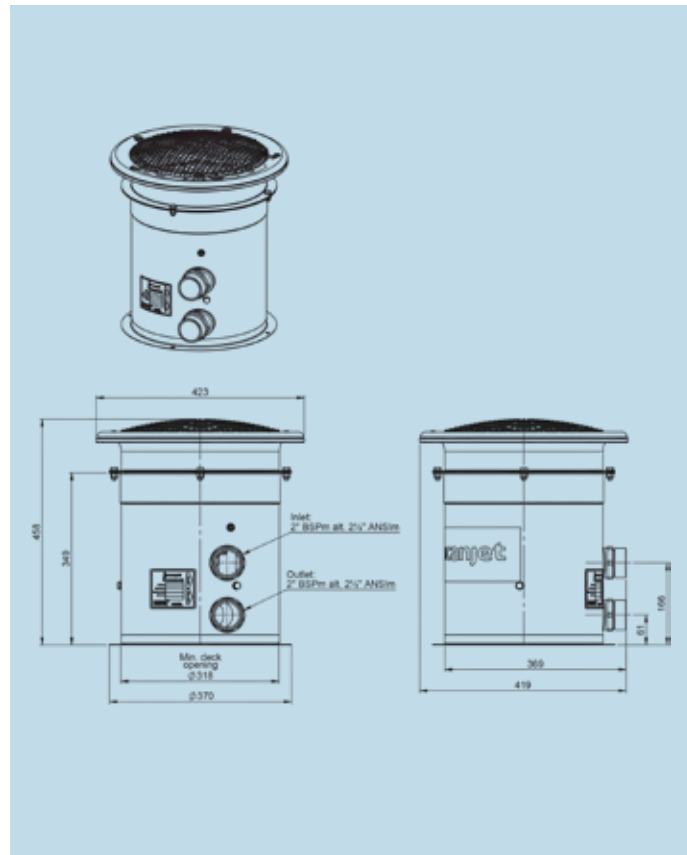

Specifications

Max Throughput: 15,000 m³/hour (8,828 cubic feet/minute)

Water Consumption: 33-55 m³/hour

Operating Press Maximum: 12 bar (174 PSIG)

Operating Press: 5 – 10 bar (0.5 - 1 Mpa)

Water Connections: Standard 2" BSP or 2.5" ANSI male thread

Materials

Casing:

Stainless Steel

Impeller:

Nickel Coated Aluminium

Lubrication:

Permanently lubricated

Installation

Minimum Deck Opening: 260 mm (10.24 inches)

Standard Deck Opening: 318 mm with 390 mm PCD

Weight

Operational:

19.8 Kgs.

Packed:

23 Kgs (appr).