# **Bio 10**

## Scanjet tank cleaning equipment



The Bio 10 rotary jet head is a hygienic tank cleaning machine that provides 360deg coverage within a given tank or process vessel. The Bio 10 is self powered by the flow of the fluid through the inlet cone of the machine. An increase in pressure and flow will correspondingly increase the length of the jet and impact upon the tank or vessel surfaces. The Bio 10 employs exclusive self-washing features that allows itself to be completely covered and has been certified in rinse validation protocols such a riboflavin rinse validation and yogurt washing trials.

### **Quality Standards**

The Bio 10 is produced in accordance to stringent quality standards and meets or exceeds ISO 9001 International Quality Standards as well as conforming to the cGMP as detailed by the United States FDA (Food and Drug Administration and EHEDG (European Hygienic Equipment Design Group).

### **Typical Cleaning Methods:**

- + Fixed Installed CIP Systems
- + Multi-Tank Solution Recovery
- + Single Use/Single Pass
- + Single Use/Recirculatory

### Typical application for the Bio 10:

- + Process vessels and reactors
- + Storage tanks
- + Transportations tanks
- + Fermenters
- + Yeast propagation

### **KEY FEATURES**

Bio 10 is an advanced tank cleaning machine specially developed for:

- + Food & Dairy
- + Pharmaceutical
- + Chemical Processing
- + Transportation
- + Beverage

Where

- + Self-washing required
- + Low fluid consumption
- + Hygienic design



BIO10\_TCT\_2016\_01\_14



Distributed and Serviced by... Tank Cleaning Technologies, Inc. 15200 Middlebrook Drive; Suite E Houston, Texas 77058 - USA


Phone: +1 281.480.4041 Fax: +1 713 516.5883 Email: sales@tankcleantech.com


www.tankcleantech.com


Stocking Locations in USA, Canada and Mexico



# Technical performance myh Usgpm 20 18 80 4X05.5 mm 4X04.5 mm 4X04.0 mm 4X04.0 mm 9 bar Pressure/Flow

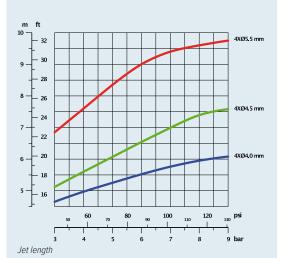

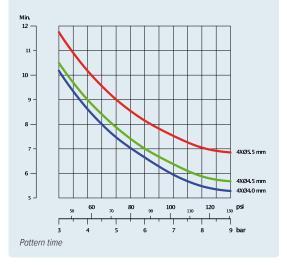

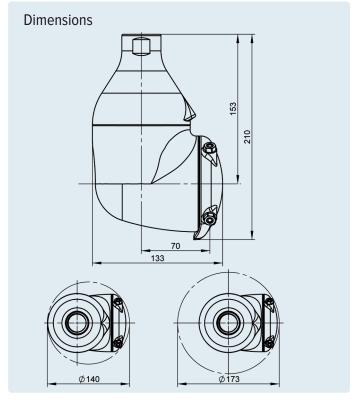

# **Specifications**

Flow	5-16 m³/h
Inlet pressure	3-10 bar
Max pressure	12 bar
Recommended pressure	6 bar
Max temperature	95°C
Max ambient temperature	140°C
Weight	5,1 kg
Connections standards	See model # table
Material	AISI 316, PTFE, PEEK
Lubrication	Cleaning media

### Standard product program model # table

	Nozzles	Connection
B 10-4x4.0-104	4x4.0 mm	
B 10-4x4.5-104	4x4.5 mm	1" NPT (F)
B 10-4x5.5-104	4x5.5 mm	
B 10-4x4.0-064	4x4.0 mm	
B 10-4x4.5-064	4x4.5 mm	1" BSP (F)
B 10-4x5.5-064	4x5.5 mm	
B 10-4x4.0-824	4x4.0 mm	
B 10-4x4.5-824	4x4.5 mm	1" Clip-On
B 10-4x5.5-824	4x5.5 mm	
B 10-4x4.0-844	4x4.0 mm	
B 10-4x4.5-844	4x4.5 mm	1" Weld-On
B 10-4x5.5-844	4x5.5 mm	
B 10-4x4.0-846	4x4.0 mm	
B 10-4x4.5-846	4x4.5 mm	1.5" Weld-On
B 10-4x5.5-846	4x5.5 mm	

BIO10\_TCT\_2016\_01\_14



**Distributed and Serviced by...** Tank Cleaning Technologies, Inc. 15200 Middlebrook Drive; Suite E

■ 15200 Middlebrook Drive; Suite E Houston, Texas 77058 - USA Phone: +1 281.480.4041 Fax: +1 713 516.5883 Email: sales@tankcleantech.com

www.tankcleantech.com

Stocking Locations in USA, Canada and Mexico

